



FOLIANTEU, s.r.o.
Stefanikova 1347/III
293 01 Mlada Boleslav
Czech Republic
tel +420 326 370 711
foliant@foliant.eu | www.foliant.eu

FOLIANT MERCURY 400 NG 4x4 DOUBLE

The FOLIANT Mercury 400 NG 4x4 double is next generation of double sided laminating machine offering very high performance. Its design is very unique: both films – upper and bottom – are heated and stick to paper by a steel high polished roller. There is why there are “in-line” installed 2 pairs of laminating rollers in the machine – front pair sticks the upper film, rear pair stick the bottom film. That solution allows to achieve a high speed of a double sided lamination in highest quality. The machine is constructed for non-stop work. It is equipped with Foliant suction feeder, 2 “in-line” laminating units, high speed bump separator and many options like non-sticky rollers, pallet stacker or Foiler. Due to its format and performance the machine is suitable for all jobs – all kinds of digital printed sheets lamination and high volumes of offset printed sheets size B3+ lamination too. **The machine maximum speed is up to 27 m/min. in single side and double side lamination as well**, while performance is up to 3240 sheets per hour of B3 portrait (white paper 200 gsm).



FEEDER

The FOLIANT Mercury 400 NG 4x4 is equipped with a rising pile back separation stream feeder and with Foliant suction feed head. It is driven by an Omron servo motor and controlled by a machine central PLC. The Becker vacuum pump is used for sheets back airing. The overlaps are electronically controlled, in an „in-run“ automatic mode, from the touch screen. The accuracy is +/- 2 mm under-lap (in a constant speed). The standard feeder is fitted with a lifting plate and its capacity is a 54 cm pile of paper. The original feeder Heidelberg is available as the option

LAMINATOR

The FOLIANT Mercury 400 NG 4x4 laminator is equipped by 2 “in-line” laminating units, one for upper film heating and sticking to paper, another one for bottom film heating and sticking. That solution allows a high speed and maximum quality of a double sided lamination. Machine allows the lamination of paper maximum sheet size 40 x 75 cm, extendable to 100 cm with optional XL module. The minimum sheet size is 32 x 25 cm (A4). The FOLIANT Mercury 400 NG 4x4 machine is double sided thermal industrial laminator, laminating the 115 – 600 gsm paper, with an unique „U“ cross bar for perfect lamination of thin sensitive sheets.

The laminating unit is equipped with an adjustable twin decurl unit:

- With a decurl blade for strong effect
- With a decurl roller for weaker effect and as scratches protection for back print

The rolls of a film are mounted on shafts that allow precise film positioning by screws. Each shaft capacity is up to 3000 m of the 24 - 42 microns film. Both film holders are equipped with a trim splitter and a perforating wheel.

The laminating process is made between 2 pairs of laminating rollers (one pair for each side) - a highly polished chrome roller, and a hard rubber pressure roller. Both chrome rollers are heated with a dry electric system. The warming up time is shorter than 10 minutes. The pressure is pneumatically adjustable, with an extra independent control knob for each pressure roller edge.

The machine is fitted with OMRON PLC, which control all machines' functions. The used PLC system includes many automation items for an easy control of the machine and a reliable lamination. The whole machine is controlled by an interactive easy understandable icon touch screen panel – no language version is needed.

SEPARATOR

The integrated bump separator (sheeter) is equipped with a pair of fast cycling rollers. The process is controlled from the machine PLC unit. The separated sheets are delivered into a vibrating jogger (optional) or a pallet stacker (optional).

LAMINATING FILMS

The machine laminates BOPP films (24 – 42 μm), Nylon films (24 – 35 μm) and PET films (20 – 26 μm). Double sided mode is limited to BOPP (24 – 42 μm) and PET (20 – 22 μm).

OPTIONS

JOGGER 400*

It is an adjustable vibrating reception unit for the laminated sheets stocking. Its capacity is limited up to a 10 cm pile of sheets.

PALLET STACKER – INTEGRATED AUTOMATIC*

Fully automatic device that unloads laminated sheets into a high pile on pallet. Its capacity is 70 cm of paper. One trolley included.

PALLET FEEDER

Standard table is replaced with pallet lift. Capacity increased to 77 cm of paper. Fully enclosed for safety, accessible from operating side and from front of the machine. One trolley included.

NON-STICKY PRESSURE ROLLER (UP TO 2X)

Standard rubber pressure roller is replaced by roller with non-sticky surface. Melted glue from film cannot stick to it even under heavy pressure. Cleaning of this roller is not necessary at all. Allows laminating sheets with windows.

FEEDING HEAD HEIDELBERG

Foliant Mercury 400 NG 4x4 can be equipped with original feeding head Heidelberg.

FOLIANT FOILER

Winding device that allows use of metalized film (gold, silver, red, etc.) and spot varnish film over digital toner.

7" TOUCH SCREEN

Standard touch screen is replaced with larger one (2,6x larger area) on movable arm.

FILM MICRO ADJUSTABLE AIR SHAFT (UP TO 2X)

Air shaft for precise and easy film placement. Replaces standard film shaft.

XL MODULE

Longer feeding table, extends maximum paper length up to 100 cm. Sheets with length over 75 cm cannot be unloaded to Integrated pallet stacker.

FILM LOADER/MANIPULATOR

It is an electric lift with a film core adaptor for loading heavy rolls of film (max. capacity 90 kg). Battery driven for seamless operation.

XXL FEEDING TABLE EXTENSION

Removable feeding table extension that is able to support paper up to 130 cm long. Sheets over 75 cm long with manual feeding only.



Optional Jogger




Optional Pallet Stacker



Optional Foliant Foiler



Optional Pallet feeder

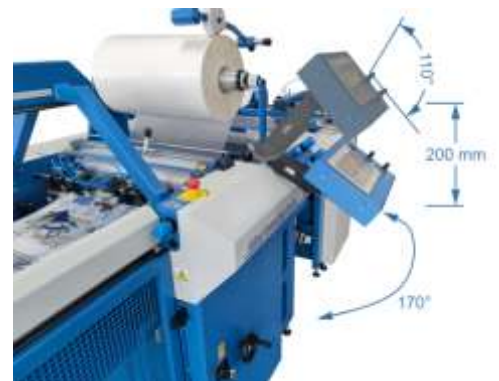

Optional 7" Touch screen

ANTI-STATIC BAR

Pair of ionization bars that remove static charge from laminated paper.

* Important – the machine have to be operated either with Jogger or Pallet stacker



Optional Heidelberg Feeding Head

Foliant Mercury 400 NG 4x4

Max Speed (single / double)	27 m / min	Min. Sheets Size (w x l)	32 x 25 cm
Max. Performance	3240 B3 / hour	Max. Sheets (w x l)	40 x 75 cm
Feeding	Automatic	External Compressor	150 l / min, 6 - 8 bar
Feeding System	Suction Head Foliant	Warming up Time	8 min
Feeder's Load Capacity	54 cm	Temperature Control	80 - 140°C
Overlaps	Automatic, PLC Control	Power Supply	3 ph., 400 V AC, 50-60 Hz
Overlaps Accuracy	+ / - 2 mm	Power	7650 W
Separation	Automatic, Bump Rollers	Floor space with Jogger (w x l)	105 x 310 cm
Paper Weight	115 - 600 gsm	Weight	590 kg
Main Rollers Pressure	Pneumatic		

The information in this document is subject to change without notice and should not be construed as a commitment by Foliant EU. Foliant EU assumes no responsibility for any errors that may appear in this document.