

multigraf

multigraf

Where Swiss Innovation Meets
Japanese Precision

www.multigraf.ch



Touchline CP375 MONO - Mark 3

CREASING & PERFORATING

About the Touchline Series

The Multigraf Touchline generation is designed to deliver high levels of flexibility and automation for a wide range of finishing needs.

Designed for efficiency, the Touchline series enables seamless, fully automated workflows, allowing multiple finishing tasks to be performed in a single pass, saving time, reducing labour, reducing complexity and ensuring consistently high-quality results.



Description

The Touchline CP375 MONO for perforating (standard and stop perforation, longitudinally or crosswise) or professional creasing is designed to meet the long-held requirements of the print finishing industry. The CP375 uniquely perforates light weight NCR paper with exceptional accuracy and consistency – a feature not commonly found in standard finishing equipment.

Tool changes are quick and seamless, thanks to its patented fully automated changing system. Each tool is electronically detected, and the required pressure is automatically adjusted. Additional tools can be conveniently stored in the integrated slide-in compartments.

The CP375 MONO supports up to four perforating heads for longitudinal processing. For added flexibility, the CP375 MONO can be seamlessly integrated with the TF375 and TCF375 folding units, enabling full inline finishing.

Max Size
375 x 1050mm

Min Size
105 x 148mm

Speed
5000 sheets/hour

Max Creases
20

80-400 gsm



Features



Perforating and Creasing Tools

The tools are automatically detected and the relevant pressure is automatically set. Additional tools may be stored in the especially designed parking slots.



Rotary Tools

Up to four perforating heads are available, all of them plug and play. The setup takes just a few seconds on the touchscreen control panel.




Side Guide System

The side guide unite features a very precise sheet infeed system: simple one hand operation, top guiding system for secure and straight infeed.

- Automatic programming
 - Flexible delivery system
- Double sheet detection
 - Easy operation with touchscreen

Typical Uses

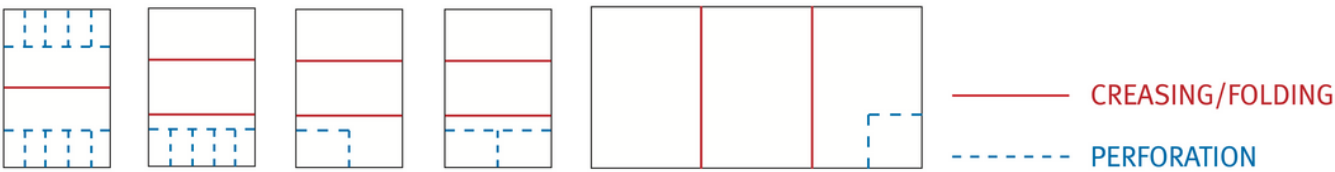

Options


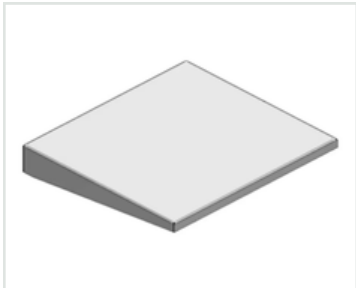


Table extension

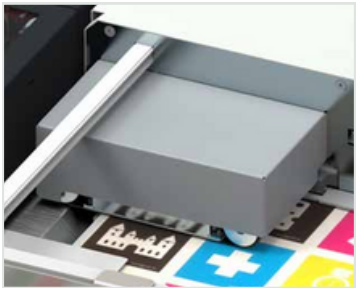

Available with high pile feeder (26in)

Specifications

Feeder system	Suction feeder
Feeder capacity	180 mm
Paper size minimum	105 x 148 mm
Paper size maximum	375 x 660 mm 375 x 1050 mm with table extension
Paper stocks perforating	80-300 gsm or max. 0.3 mm*
Paper stocks creasing	80-400 gsm or max. 0.4 mm*
Control panel	Touchscreen
Double sheet detection	Ultrasonic

Working system	Multigraf Quick-Set interchangeable tools
Reception tray height	120 mm
Delivery belt	Optional shingling delivery, L = 1,100 mm, P/N 482.112
Speed	Depending on job, up to 6,000 sheets/hour
Dimensions	ca. 1,560 x 610 x 1,200 mm
Weight	ca. 140 kg
Electrical connection	100-240 VAC, 50/60 Hz

*Paper stocks depending on material quality

To find out more about the Touchline CP375 MONO, find and contact your local distributor by visiting <https://www.multigraf.ch/distributors/>

Alternatively, reach out to us directly via our contact form: <https://www.multigraf.ch/contact/>